SIDE ELEVATIONS

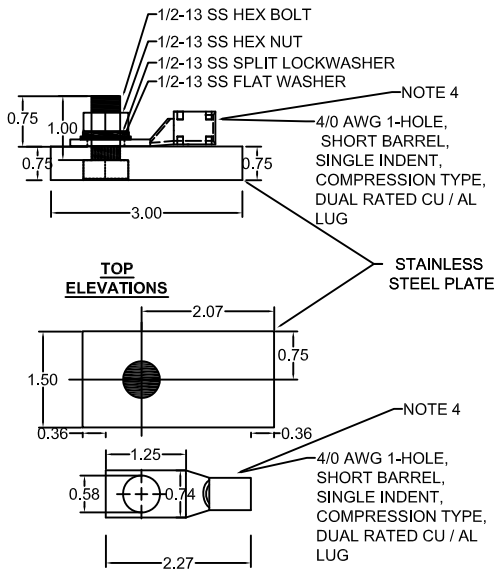

TOP ELEVATIONS

PANEL GROUNDING PAD DETAIL — 212B / 1

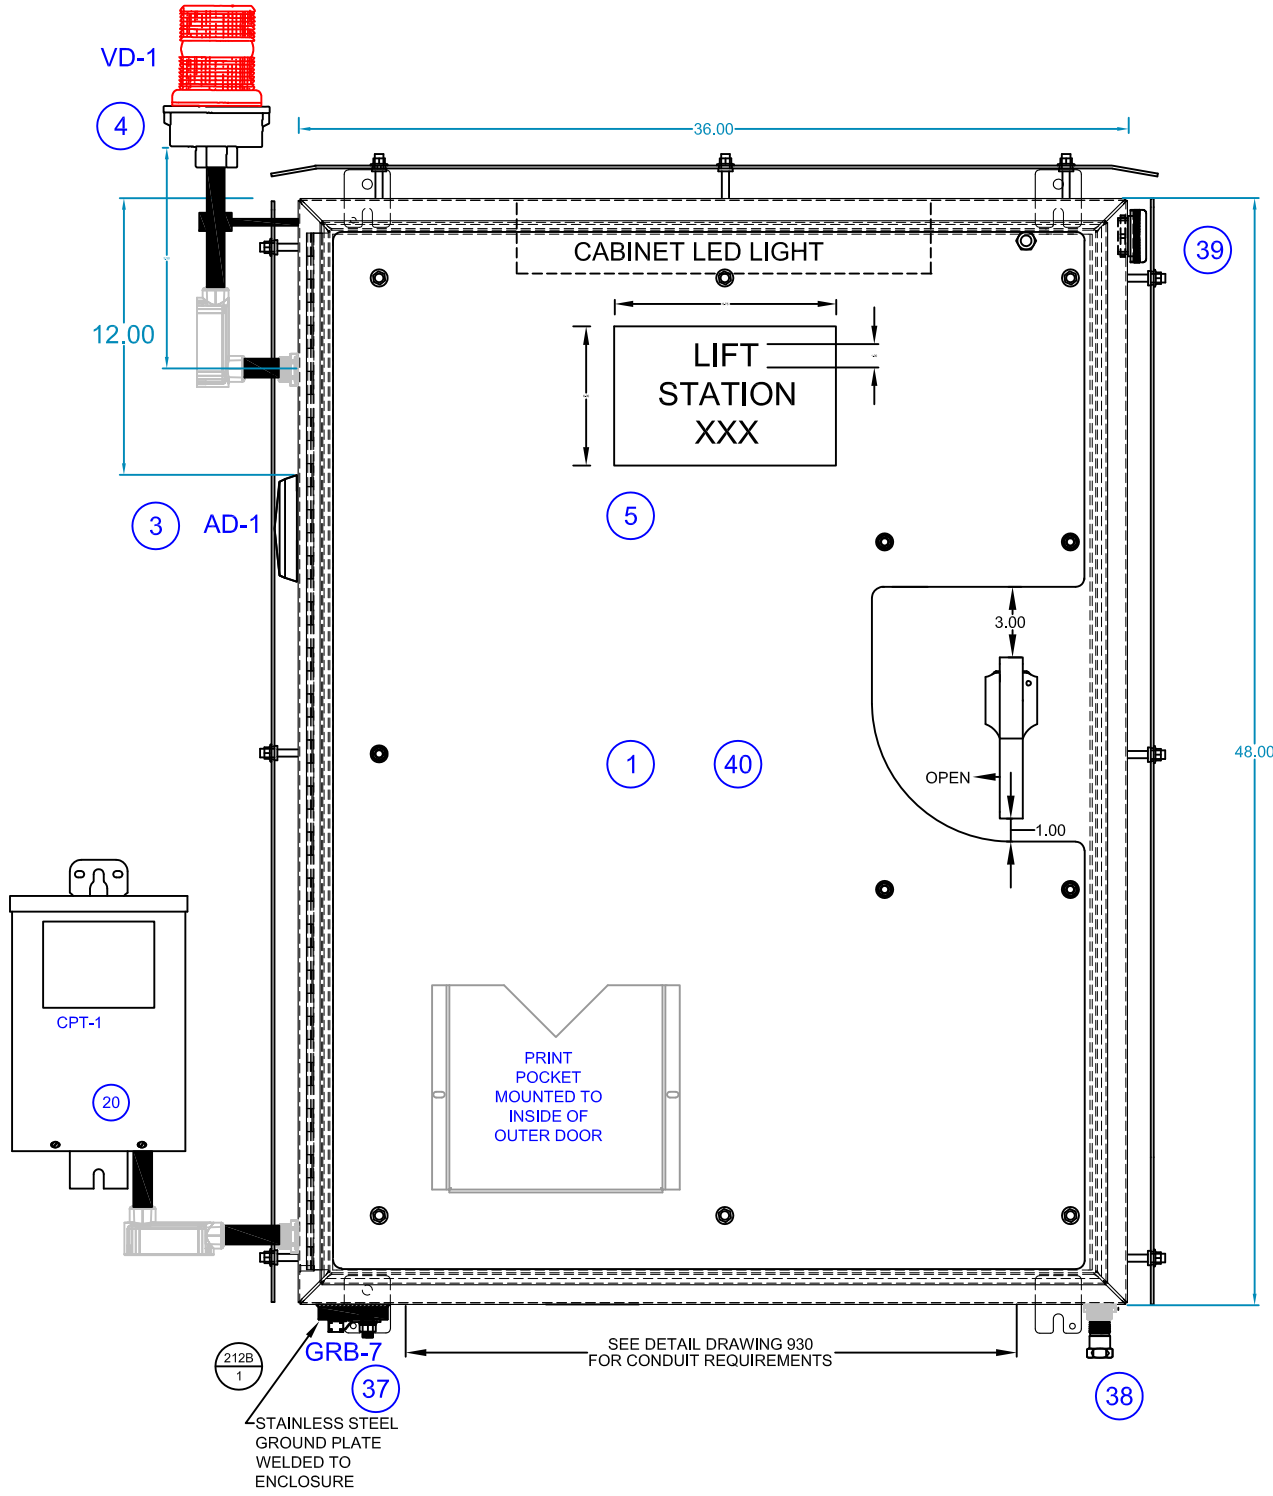

DIMENSIONS IN INCHES

NOTES:
1. MOTOR CONTROL WIRING LIMITED TO A MAXIMUM OF:
15 HP @ 230 VOLTS
25 HP @ 460 VOLTS

2. FRONT SUNSHIELD IS NOT ILLUSTRATED FOR CLARITY. FRONT SHIELD ON ENCLOSURE IS REQUIRED AS PER COO SPECIFICATION.

3. COMPONENT IDENTIFICATION REFLECTED ON BILL OF MATERIALS DRAWING # 214

4. # 6 1-HOLE, SHORT BARREL, SINGLE INDENT, COMPRESSION TYPE, DUAL RATED CU / AL LUG FOR GRB-6.

5. LIMITED TO 50% > AND NO < NAMEPLATE RATING OF MOTOR.

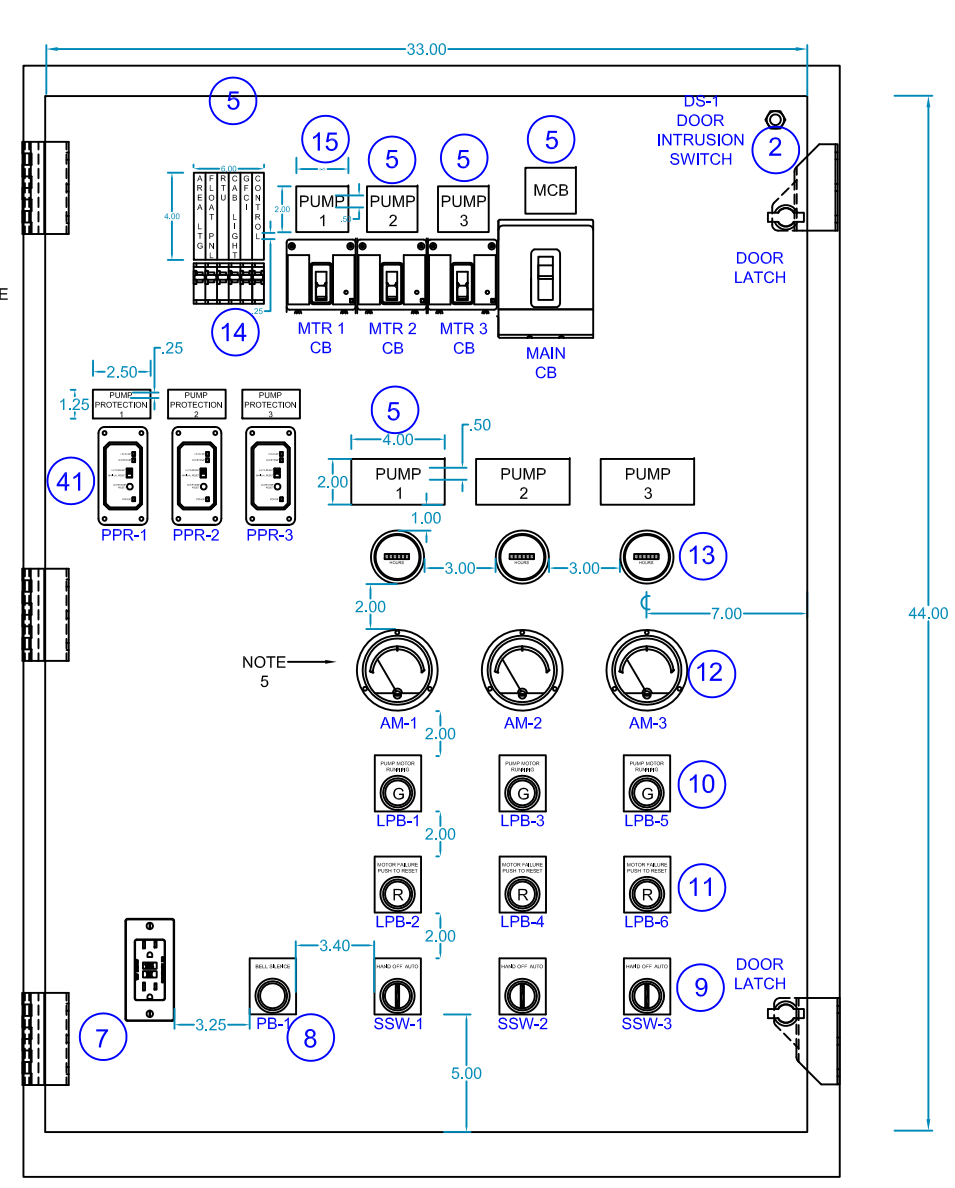

	SCALE: N.T.S.	-	REVISIONS AS PER MEETING	09-09-2013	JG	WASTEWATER DIVISION, INDUSTRIAL AUTOMATION GROUP — CITY OF ORLANDO, FLORIDA	TITLE: LIFT STATIONS STANDARDS < 25 HP NEMA STARTER TRIPLEX PCP FOR STATIONERY GENERATOR FRONT AND INNER PANEL ELEVATIONS
	DESIGN: IAG / LS						SHEET 212B
	DRAWN BY: JG						
	APPROVED BY: WW	NO	REVISION	DATE	BY		