




DIMENSIONS IN INCHES

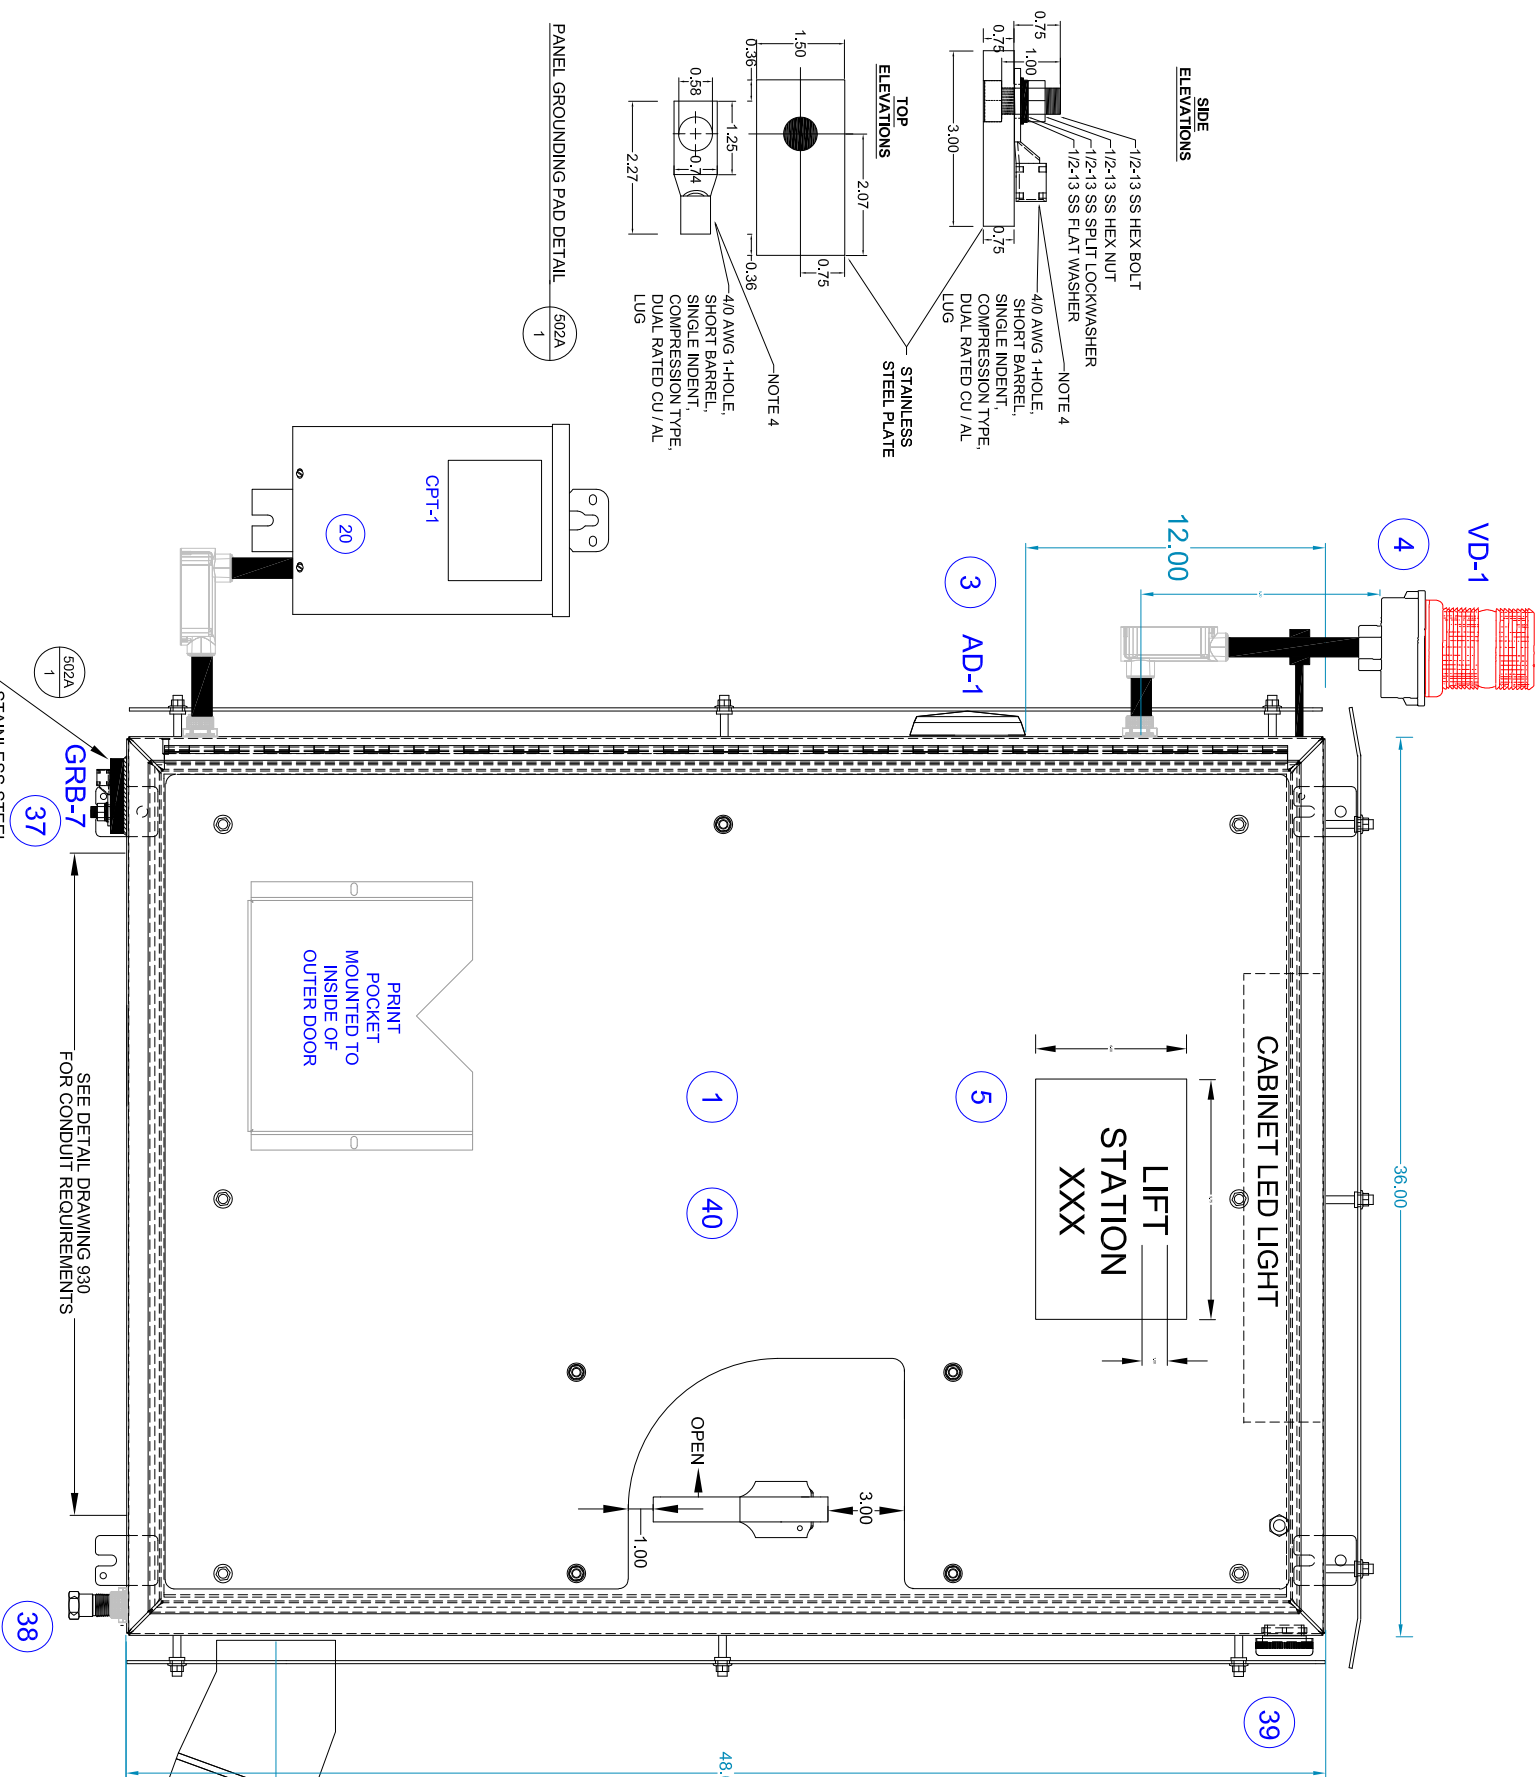

- NOTES:
1. MOTOR CONTROL WIRING LIMITED TO A MAXIMUM OF: 15 HP @ 230 VOLTS 25 HP @ 460 VOLTS
 2. FRONT SUNSHIELD IS NOT ILLUSTRATED FOR CLARITY. FRONT SHIELD ON ENCLOSURE IS REQUIRED AS PER COO SPECIFICATION.
 3. COMPONENT IDENTIFICATION REFLECTED ON BILL OF MATERIALS DRAWING # 504
 4. # 6 1-HOLE, SHORT BARREL, SINGLE INDENT, COMPRESSION TYPE, DUAL RATED CU / AL LUG FOR GRB-6.

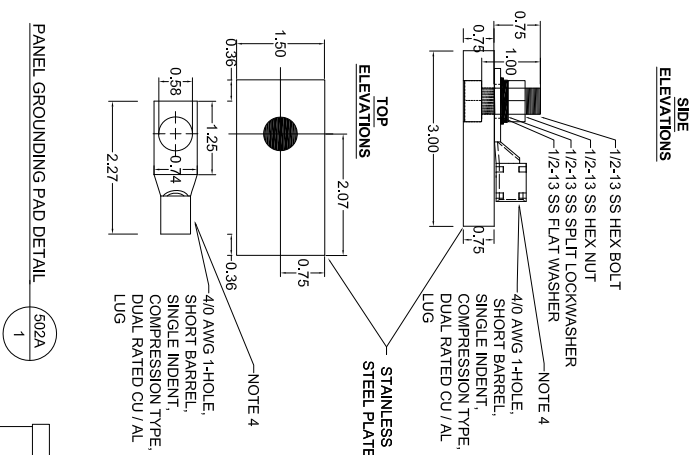

| | | | | | | | | | |
|---|--|----|--|--------------------------|---|------------|--|----|--|
| SCALE: N.T.S. | | - | | REVISIONS AS PER MEETING | | 09-09-2013 | | JG | |
| DESIGN: JAG / LS | | | | | | | | | |
| DRAWN BY: JG | | | | | | | | | |
| APPROVED BY: WW | | NO | | REVISION | | DATE | | BY | |
| <div><p>WASTEWATER DIVISION, INDUSTRIAL AUTOMATION GROUP</p><p>CITY OF ORLANDO, FLORIDA</p></div> | | | | | | | | | |
| TITLE: | | | | | LIFT STATIONS STANDARDS 25 HP TO < 50 HP DUPLEX SSRVS PUMP CONTROLLER FOR PORTABLE GENERATOR FRONT AND INNER PANEL ELEVATIONS | | | | |
| | | | | | <div><p>SHEET</p><p>502A</p></div> | | | | |